


Embedded RP in IPv6 Multicast



To find the embedded RP IPv6 address when given a multicast group address of the below format, use the following method (FF78:640:2001:D:BAAA:F03::100 is used in this case)...

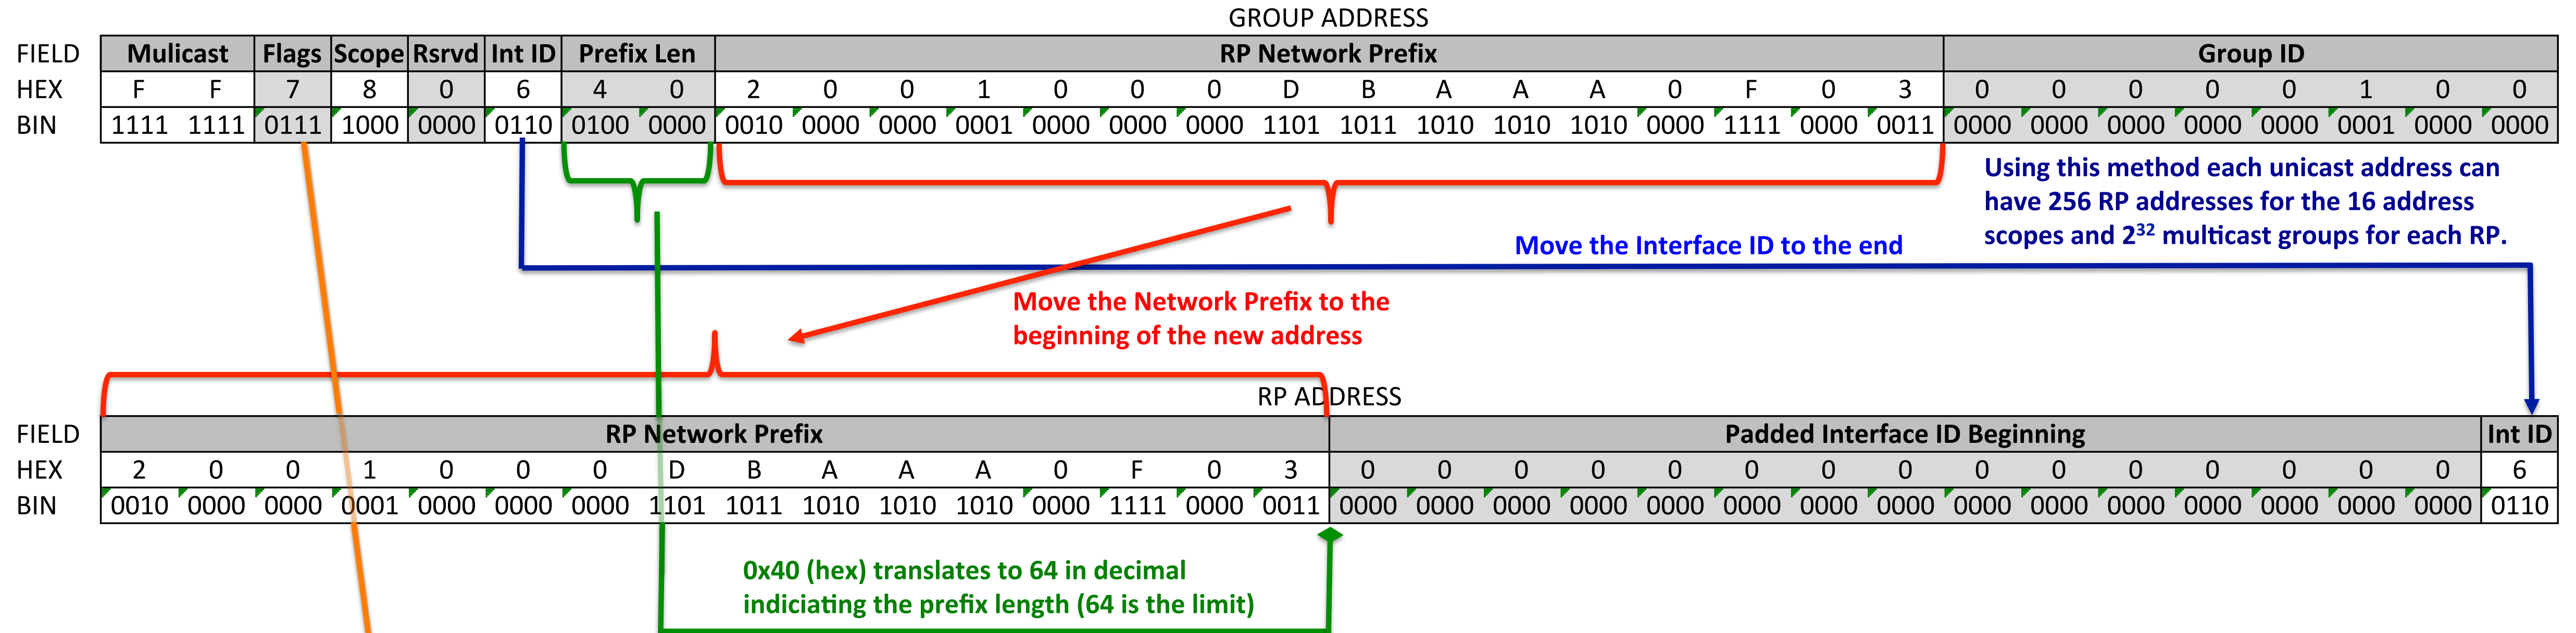

Flags		
Bit	Letter	Meaning
0	n/a	Rsrvd
1	R	Indicates there is an embedded RP
1	P	1 = Unicast based prefix
1	T	1 = No permanently assigned