




## NAT Types

INSIDE/OUTSIDE - who controls in (Host is Inside)  
LOCAL/GLOBAL - referencing something Private  
(Host) or Public (Server)

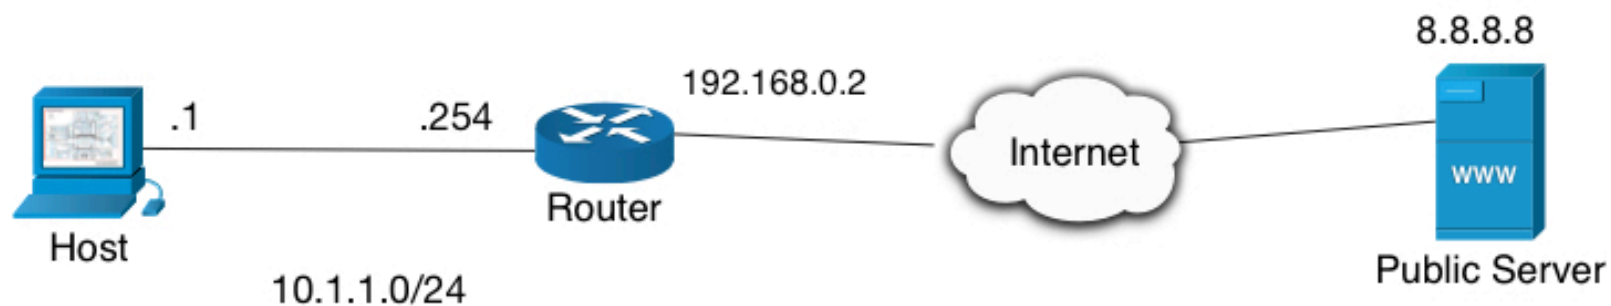

Inside Local = 10.1.1.1  
Inside Global = 192.168.0.2  
Outside Local = 8.8.8.8\*  
Outside Global = 8.8.8.8

\* If destination NAT is used this might be different (public server as seen from host)